

## Description

The check valves RV600 are spring-loaded with threaded connection. The flow is reduced and contains a blow-off-proof spool.


## Product features

- Face to face dimension nach DIN 3202 M8
  - Max. working pressure 40 bar
  - Min. opening pressure 0.15 bar
  - Rating Threaded connection DIN 2999
  - Temperature range -10°C ÷ 200°C
- The check valves RV600 meet the safety requirements of the pressure Equipments Directive 97/23/EC (PED) appendix 1 for fluids of the groups 1 and 2



## Materials

1	Body	1.4408
2	Screwed plug	1.4408
3	Guide	1.4408
4	Spring	1.4301
5	Pressure ring	1.4401
6	Nut	1.4301
7	Disc	PTFE
8	O-ring	PTFE

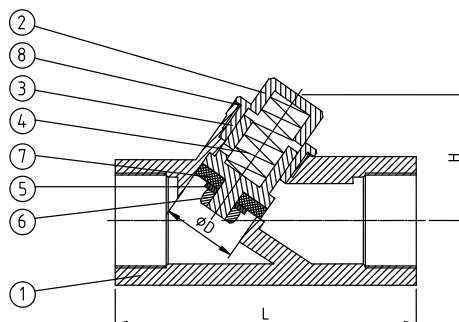

## Dimensions

Code	DN	Rp"	L	H	ØD	kg
RV600014	8	¼	65	30	12	0,25
RV600038	10	¾	65	30	12	0,25
RV600012	15	½	65	34	12	0,25
RV600034	20	¾	75	39	17,4	0,40
RV600100	25	1	91	42	20	0,60
RV600114	32	1 ¼	110	50	32	0,85
RV600112	40	1 ½	120	57	35	1,10
RV600200	50	2	151	70	45	1,60

**Notes**

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

**InterApp AG**  
Grundstrasse 24  
CH-6343 Rotkreuz  
Phone +41 (0) 41 7982233  
Fax +41 (0) 41 7982234  
info@ch.interapp.net

**InterApp Ges.m.b.H.**  
Kolpingstrasse 19  
A-1230 Wien  
Phone +43 (0) 1 6162371-0  
Fax +43 (0) 1 6162371-99  
info@at.interapp.net

**InterApp Italiana**  
Via Gramsci 29  
I-20016 Pero (MI)  
Phone +39 02 339371  
Fax +39 02 33937200  
info@it.interapp.net

**InterApp GmbH**  
Schillerstrasse 50  
D-42489 Wülfrath  
Phone +49(2058) 8909250  
Fax +49(2058) 8909255  
info@de.interapp.net

**AVK Válvulas S.A.  
InterApp Válvulas S.A.**  
Poligono Industrial Francoli, parcela 27  
E-46006 Tarragona  
Phone +34 977 543 008  
Fax +34 977 541 622  
avk@avkvalvulas.com